

PD688 & PD689 FM APPROVED, CSA CERTIFIED, & ATEX CERTIFIED Intrinsic Loop-powered Meter Safety Barrier Connections


SECTION	AGENCY	DESCRIPTION
1.0		General Notes
2.0	FM	Single or Dual Channel Intrinsic Safety Barrier
3.0	CSA	Single or Dual Channel Intrinsic Safety Barrier-Entity Installation
4.0	ATEX	Single or Dual Channel Intrinsic Safety Barrier

**NOTE: THIS IS AN AGENCY CONTROLLED DOCUMENT
NO CHANGES CAN BE MADE WITHOUT PRIOR APPROVAL.**

1.0 GENERAL NOTES

- Control room equipment must not use or generate more than 250 VRMS or VDC.
- US installations must be in accordance with ANSI/ISA RP12.06.01 "Installation of Intrinsically Safe Systems for Hazardous (Classified) Locations" and the National Electrical Code (ANSI/NFPA 70). Canadian installations must be in accordance with the Canadian Electrical Code, Part 1. European Community installations must be in accordance with ATEX directive 94/9/EC.
- Dust-tight conduit seals must be used when installed in Class II and Class III environments.
- Hazardous location installation instructions for associated apparatus (barrier) must also be followed when installing this equipment.
- For safe installation of an FM Approved/CSA Certified/ATEX Certified transmitter in series with PD688/PD689 loop indicator, the hazardous location installation instructions for the transmitter, PD688/PD689 loop indicator, and associated apparatus (barrier) must be compatible.
- PD688/PD689 indicator does not add capacitance or inductance to loop under normal or fault conditions.
- Substitution of components may impair hazardous location safety.
- Mounting screw torque shall not exceed 8 lb-in (0.9 Nm)

Panel Mounting

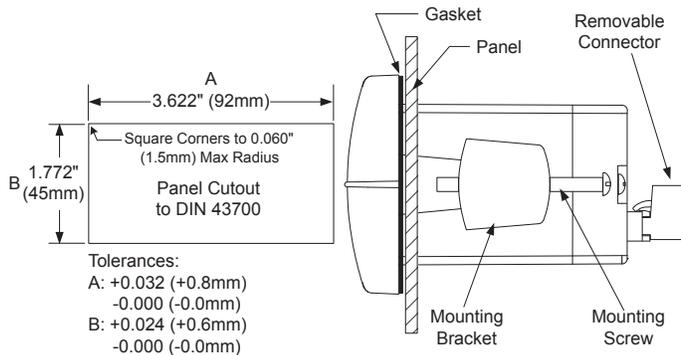


2.0 FM INSTALLATION WIRING DIAGRAM USING SINGLE OR DUAL CHANNEL INTRINSIC SAFETY BARRIER


Application Notes:

- $U_i > U_o$ of single channel barrier or V_i of dual channel barrier
- $I_i > I_o$ of single channel barrier or I_i of dual channel barrier
- $P_i > P_o$ of single channel barrier or P_i of dual channel barrier
- L_i plus interconnecting wiring $< L_o$ of single or dual channel barrier
- C_i plus interconnecting wiring $< C_o$ of single or dual channel barrier
- It is not necessary to use intrinsic safety barriers when installing the PD688/PD689 in Class I, II, III, Division 2, Groups ABCDFG, maximum input voltage = 30 VDC. Division 2 wiring methods must be used when not powering from a barrier.


With Backlight

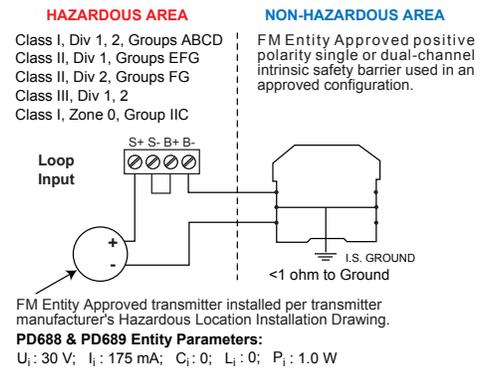

Without Backlight

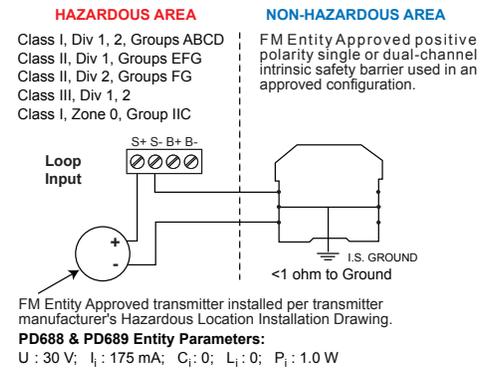

Open Collector Output

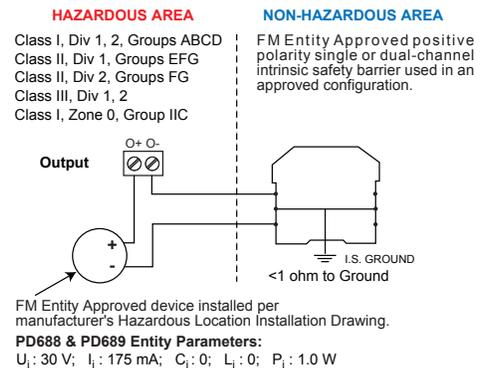

PD688 & PD689 FM APPROVED, CSA CERTIFIED, & ATEX CERTIFIED Intrinsic Loop-powered Meter Safety Barrier Connections

3.0 CSA INSTALLATION WIRING DIAGRAM USING SINGLE OR DUAL CHANNEL INTRINSIC SAFETY BARRIER-ENTITY INSTALLATION

Application Notes:

3.1 Barrier parameters must meet the following requirements:

$$V_{oc} \text{ or } U_o \leq V_{max} \text{ or } U_i$$

$$I_{sc} \text{ or } I_o \leq I_{max} \text{ or } I_i; C_a \text{ or } C_o \geq C_i + C_{cable}$$

$$L_a \text{ or } L_o \geq L_i + L_{cable}; P_o < P_i$$


3.2 For CSA Certification, barrier and transmitter must be CSA Certified with Entity Parameters and must be connected per manufacturer's instructions.

3.3 Class II & III environments require the installation of the meter into one of the following Precision Digital enclosures: PDA2407, PDA2408, PDA2409, or PDA2410.

3.4 It is not necessary to use intrinsic safety barriers when installing the PD688/PD689 in Class I, II, III, Division 2, Groups ABCDFG, maximum input voltage = 30 VDC. Division 2 wiring methods must be used when not powering from a barrier.

With Backlight


HAZARDOUS AREA Class I, Div 1, 2, Groups ABCD Class II, Div 1, Groups EFG Class II, Div 2, Groups FG Class III, Div 1, 2 Class I, Zone 0, Group IIC	NON-HAZARDOUS AREA CSA Entity Certified positive polarity single or dual-channel intrinsic safety barrier used in an approved configuration.
---	--

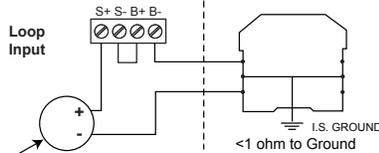

CSA Entity Certified transmitter installed per transmitter manufacturer's Hazardous Location Installation Drawing.
PD688 & PD689 Entity Parameters:
 $V_{max} : 30 \text{ V}; I_{max} : 175 \text{ mA}; C_i : 0; L_i : 0; P_i : 1.0 \text{ W}$

Without Backlight


HAZARDOUS AREA Class I, Div 1, 2, Groups ABCD Class II, Div 1, Groups EFG Class II, Div 2, Groups FG Class III, Div 1, 2 Class I, Zone 0, Group IIC	NON-HAZARDOUS AREA CSA Entity Certified positive polarity single or dual-channel intrinsic safety barrier used in an approved configuration.
---	--

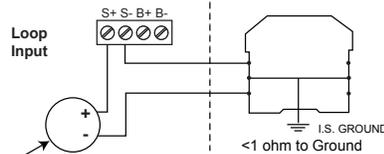

CSA Entity Certified transmitter installed per transmitter manufacturer's Hazardous Location Installation Drawing.
PD688 & PD689 Entity Parameters:
 $V_{max} : 30 \text{ V}; I_{max} : 175 \text{ mA}; C_i : 0; L_i : 0; P_i : 1.0 \text{ W}$

Open Collector Output

HAZARDOUS AREA Class I, Div 1, 2, Groups ABCD Class II, Div 1, Groups EFG Class II, Div 2, Groups FG Class III, Div 1, 2 Class I, Zone 0, Group IIC	NON-HAZARDOUS AREA CSA Entity Certified positive polarity single or dual-channel intrinsic safety barrier used in an approved configuration.
---	--

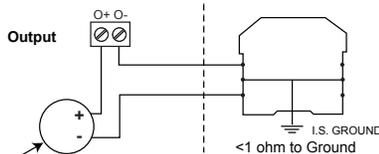

CSA Entity Certified device installed per manufacturer's Hazardous Location Installation Drawing.
PD688 & PD689 Entity Parameters:
 $V_{max} : 30 \text{ V}; I_{max} : 175 \text{ mA}; C_i : 0; L_i : 0; P_i : 1.0 \text{ W}$

4.0 ATEX INSTALLATION WIRING DIAGRAM USING SINGLE OR DUAL CHANNEL INTRINSIC SAFETY BARRIER

Application Notes:

4.1 Entity parameters must meet the following requirements:

$$V_{max} : 30 \text{ V}$$

$$I_{max} : 175 \text{ mA}$$

$$C_i : 0$$


$$L_i : 0$$

$$P_i : 1.0 \text{ W}$$

4.2 For ATEX Certification, barrier and transmitter must be ATEX Certified with Entity Parameters and must be connected per manufacturer's instructions.

With Backlight


HAZARDOUS AREA Zone 0, Group IIC	NON-HAZARDOUS AREA ATEX Entity Certified positive polarity single or dual-channel intrinsic safety barrier(s) used in an approved configuration.
--	--

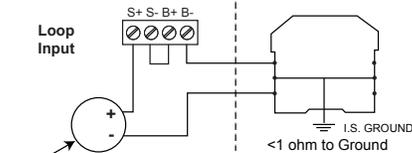

ATEX Entity Certified transmitter installed per transmitter manufacturer's Hazardous Location Installation Drawing.
PD688 & PD689 Entity Parameters:
 $V_{max} : 30 \text{ V}; I_{max} : 175 \text{ mA}; C_i : 0; L_i : 0; P_i : 1.0 \text{ W}$

Without Backlight


HAZARDOUS AREA Zone 0, Group IIC	NON-HAZARDOUS AREA ATEX Entity Certified positive polarity single or dual-channel intrinsic safety barrier(s) used in an approved configuration.
--	--

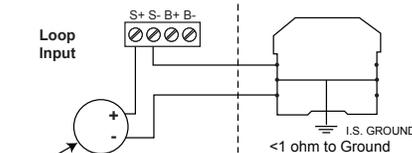

ATEX Entity Certified transmitter installed per transmitter manufacturer's Hazardous Location Installation Drawing.
PD688 & PD689 Entity Parameters:
 $V_{max} : 30 \text{ V}; I_{max} : 175 \text{ mA}; C_i : 0; L_i : 0; P_i : 1.0 \text{ W}$

Open Collector Output

HAZARDOUS AREA Zone 0, Group IIC	NON-HAZARDOUS AREA ATEX Entity Certified positive polarity single or dual-channel intrinsic safety barrier(s) used in an approved configuration.
--	--

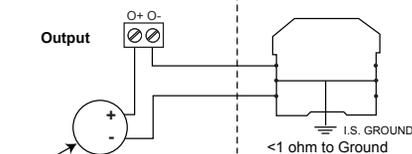

ATEX Entity Certified transmitter installed per manufacturer's Hazardous Location Installation Drawing.
PD688 & PD689 Entity Parameters:
 $V_{max} : 30 \text{ V}; I_{max} : 175 \text{ mA}; C_i : 0; L_i : 0; P_i : 1.0 \text{ W}$