



Measuring system

Combined Error:	0,050 %
Load cell connection:	4-wire
Nominal sensitivity:	1
OIML class:	C1
Weighing capacity [Max]:	10 kg

Environmental conditions

Maximum operating temperature:	50 °C
Maximum operating temperature:	60 °C
Minimum ambient temperature:	-20 °C
Minimum operating temperature:	-10 °C

Services (optional)

DAkkS Calibration certificate (Pressure):	963-261V
--	----------

Category

Brand:	Sauter
--------	--------

Packaging & shipping

Delivery:	24 h
Dimensions packaging (WxDxH):	90 x 90 x 20 mm
Gross weight:	60 g
Net weight:	60 g
Shipping method:	Parcel service


Construction

Cable length:	45 cm
Dimensions (WxDxH):	34 x 34 x 4,5 mm

Piktogramme

STANDARD



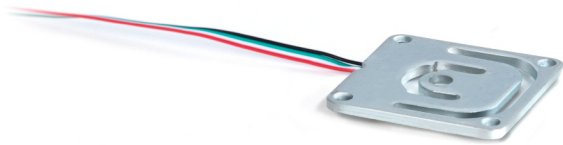

Measuring system

Combined Error:	0,050 %
Load cell connection:	4-wire
Nominal sensitivity:	1,500
OIML class:	C1
Weighing capacity [Max]:	30 kg

Environmental conditions

Maximum operating temperature:	50 °C
Maximum operating temperature:	60 °C
Minimum ambient temperature:	-20 °C
Minimum operating temperature:	-10 °C

Services (optional)

DAkkS Calibration certificate (Pressure):	963-261V
--	----------

Category

Brand:	Sauter
--------	--------

Packaging & shipping

Delivery:	24 h
Dimensions packaging (WxDxH):	90 x 90 x 20 mm
Gross weight:	60 g
Net weight:	60 g
Shipping method:	Parcel service

Construction

Cable length:	45 cm
Dimensions (WxDxH):	34 x 34 x 4,5 mm

Piktogramme

STANDARD

