

Measuring system

| | |
|--------------------------|---------|
| Combined Error: | 0,050 % |
| Load cell connection: | 4-wire |
| Nominal sensitivity: | 0,800 |
| OIML class: | C1 |
| Weighing capacity [Max]: | 10 kg |

Environmental conditions

| | |
|--------------------------------|--------|
| Maximum operating temperature: | 50 °C |
| Maximum operating temperature: | 60 °C |
| Minimum ambient temperature: | -20 °C |
| Minimum operating temperature: | -10 °C |

Services (optional)

| | |
|--|----------|
| DAkkS Calibration certificate (Pressure): | 963-261V |
|--|----------|

Category

| | |
|--------|--------|
| Brand: | Sauter |
|--------|--------|

Packaging & shipping

| | |
|-------------------------------|-----------------|
| Delivery: | 24 h |
| Dimensions packaging (WxDxH): | 90 x 90 x 20 mm |
| Gross weight: | 60 g |
| Net weight: | 60 g |
| Shipping method: | Parcel service |


Construction

| | |
|---------------------|------------------|
| Cable length: | 45 cm |
| Dimensions (WxDxH): | 34 x 34 x 4,5 mm |

Piktogramme

STANDARD



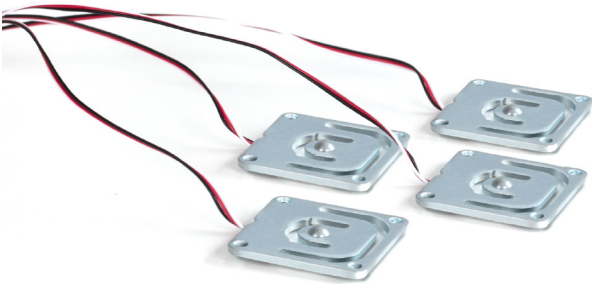

Measuring system

| | |
|--------------------------|---------|
| Combined Error: | 0,050 % |
| Load cell connection: | 4-wire |
| Nominal sensitivity: | 0,800 |
| OIML class: | C1 |
| Weighing capacity [Max]: | 30 kg |

Environmental conditions

| | |
|--------------------------------|--------|
| Maximum operating temperature: | 50 °C |
| Maximum operating temperature: | 60 °C |
| Minimum ambient temperature: | -20 °C |
| Minimum operating temperature: | -10 °C |

Services (optional)

| | |
|--|----------|
| DAkkS Calibration certificate (Pressure): | 963-261V |
|--|----------|

Category

| | |
|--------|--------|
| Brand: | Sauter |
|--------|--------|

Packaging & shipping

| | |
|-------------------------------|-----------------|
| Delivery: | 24 h |
| Dimensions packaging (WxDxH): | 90 x 90 x 20 mm |
| Gross weight: | 60 g |
| Net weight: | 60 g |
| Shipping method: | Parcel service |


Construction

| | |
|---------------------|------------------|
| Cable length: | 45 cm |
| Dimensions (WxDxH): | 34 x 34 x 4,5 mm |

Piktogramme

STANDARD



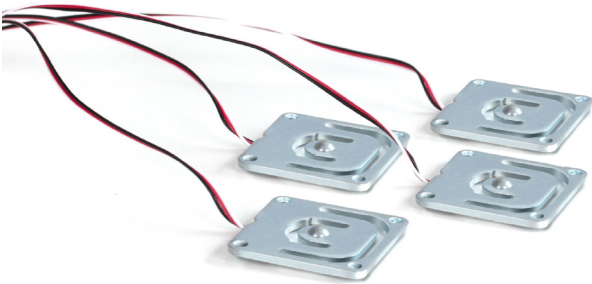

Measuring system

| | |
|--------------------------|---------|
| Combined Error: | 0,050 % |
| Load cell connection: | 4-wire |
| Nominal sensitivity: | 0,800 |
| OIML class: | C1 |
| Weighing capacity [Max]: | 50 kg |

Environmental conditions

| | |
|--------------------------------|--------|
| Maximum operating temperature: | 50 °C |
| Maximum operating temperature: | 60 °C |
| Minimum ambient temperature: | -20 °C |
| Minimum operating temperature: | -10 °C |

Services (optional)

| | |
|--|----------|
| DAkkS Calibration certificate (Pressure): | 963-261V |
|--|----------|

Category

| | |
|--------|--------|
| Brand: | Sauter |
|--------|--------|

Packaging & shipping

| | |
|-------------------------------|-----------------|
| Delivery: | 24 h |
| Dimensions packaging (WxDxH): | 90 x 90 x 20 mm |
| Gross weight: | 60 g |
| Net weight: | 60 g |
| Shipping method: | Parcel service |

Construction

| | |
|---------------------|------------------|
| Cable length: | 45 cm |
| Dimensions (WxDxH): | 34 x 34 x 4,5 mm |

Piktogramme

STANDARD

