

# KERN CO0.5-Y5

Tension and compression measuring cells made from stainless steel

# KERN®

## Piktogramme

### STANDARD



### OPTION



## Measuring system

Combined Error:	0,100 %
Load cell connection:	4-wire
Measuring capacity [Max]:	5 N
Nominal sensitivity:	1
OIML class:	G1
Weighing capacity [Max]:	500 g

## Environmental conditions

Maximum operating temperature:	80 °C
Maximum operating temperature:	60 °C
Minimum ambient temperature:	-20 °C
Minimum operating temperature:	-10 °C

## Services (optional)

DAkkS Calibration certificate (Pressure):	963-261V
DAkkS Calibration certificate (Tensile):	963-161V
DAkkS Calibration certificate (Tensile/Pressure):	963-361V

## Category

Brand:	Sauter
--------	--------

## Packaging & shipping

Delivery:	24 h
Dimensions packaging (WxDxH):	150 x 105 x 40 mm
Gross weight:	71 g
Net weight:	30 g
Shipping method:	Parcel service

## Construction

Cable length:	2 m
---------------	-----

# KERN CO1-Y5

Tension and compression measuring cells made from stainless steel



## Piktogramme

### STANDARD



### OPTION



### Measuring system

Combined Error:	0,100 %
Load cell connection:	4-wire
Measuring capacity [Max]:	10 N
Nominal sensitivity:	1
OIML class:	G1
Weighing capacity [Max]:	1 kg

### Environmental conditions

Maximum operating temperature:	80 °C
Maximum operating temperature:	60 °C
Minimum ambient temperature:	-20 °C
Minimum operating temperature:	-10 °C

### Services (optional)

DAkkS Calibration certificate (Pressure):	963-261V
DAkkS Calibration certificate (Tensile):	963-161V
DAkkS Calibration certificate (Tensile/Pressure):	963-361V

### Category

Brand:	Sauter
--------	--------

### Packaging & shipping

Delivery:	24 h
Dimensions packaging (WxDxH):	150 x 105 x 40 mm
Gross weight:	71 g
Net weight:	30 g
Shipping method:	Parcel service

### Construction

Cable length:	2 m
---------------	-----

# KERN CO10-Y5


Tension and compression measuring cells made from stainless steel

## Piktogramme

### STANDARD



### OPTION

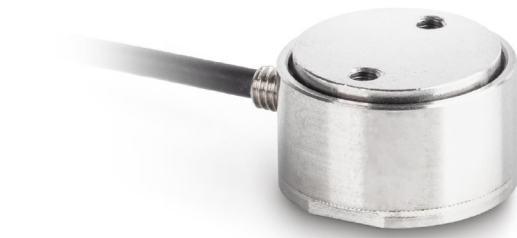

### Measuring system

Combined Error:	0,100 %
Load cell connection:	4-wire
Measuring capacity [Max]:	100 N
Nominal sensitivity:	2
OIML class:	G1
Weighing capacity [Max]:	10 kg

### Environmental conditions

Maximum operating temperature:	80 °C
Maximum operating temperature:	60 °C
Minimum ambient temperature:	-20 °C
Minimum operating temperature:	-10 °C

### Services (optional)

DAkkS Calibration certificate (Pressure):	963-261V
DAkkS Calibration certificate (Tensile):	963-161V
DAkkS Calibration certificate (Tensile/Pressure):	963-361V

### Category

Brand:	Sauter
--------	--------

### Packaging & shipping

Delivery:	24 h
Dimensions packaging (WxDxH):	150 x 105 x 40 mm
Gross weight:	71 g
Net weight:	30 g
Shipping method:	Parcel service

### Construction

Cable length:	2 m
---------------	-----

# KERN CO5-Y5

Tension and compression measuring cells made from stainless steel




## Piktogramme

### STANDARD



### OPTION

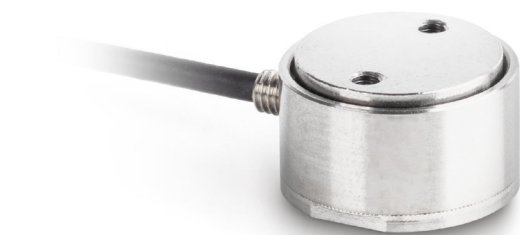

## Measuring system

Combined Error:	0,100 %
Load cell connection:	4-wire
Measuring capacity [Max]:	50 N
Nominal sensitivity:	2
OIML class:	G1
Weighing capacity [Max]:	5 kg

## Environmental conditions

Maximum operating temperature:	80 °C
Maximum operating temperature:	60 °C
Minimum ambient temperature:	-20 °C
Minimum operating temperature:	-10 °C

## Services (optional)

DAkkS Calibration certificate (Pressure):	963-261V
DAkkS Calibration certificate (Tensile):	963-161V
DAkkS Calibration certificate (Tensile/Pressure):	963-361V

## Category

Brand:	Sauter
--------	--------

## Packaging & shipping

Delivery:	24 h
Dimensions packaging (WxDxH):	150 x 105 x 40 mm
Gross weight:	71 g
Net weight:	30 g
Shipping method:	Parcel service

## Construction

Cable length:	2 m
---------------	-----