



# WALL MOUNTED DEVICES

Meters  
Controllers  
Counters  
Serial displays



Measure,  
**Control** and Log Data



# Wall mounted devices

- METERS
- CONTROLLERS
- COUNTERS
- SERIAL DISPLAYS

Digital counters and industrial meters constitute the greatest branch of automation devices. The group includes simple indicators intended for displaying basic parameters / operating states and physical values (i.e. temperature, level, pressure etc.), and also more sophisticated controllers of those values, equipped with several control outputs. The devices are equipped with analogue (current, voltage, RTD, or TC type), binary, or serial inputs. The inputs applied are dependent on the kind of measuring signal and the type of sensor connection.



Wall-mounted devices are an extraordinary series of counters and meters. Their greatest advantages are an extremely hermetic housing (IP67) and the possibility of both an indoor and outdoor installation.

The control functions of those devices are very meaningful as well. While adjusting a model to the requirements of a particular application a user can choose between binary and analogue outputs: current and voltage ones. Wide range of outputs and the possibility of using various types of those outputs in one device make it possible to apply the counters and meters to controlling purposes in simple and more sophisticated systems for signalling, alarming, and controlling.

## Applications



- water supply and sewage systems
- machine industry
- food industry
- chemical industry
- pharmacy
- heavy and mining industry
- tire and rubber industry
- cable industry
- shipbuilding industry

# Technical data



- meter, controller, counter, flow counter, tachometer, timer, etc.
- tight IP 67 case
- wall mounting
- extended displayed values range until 6 digits: -99999 ÷ 999999
- analogue and binary inputs
- binary outputs: REL / OC
- analogue output: active or passive
- temperature range -20°C ÷ +50°C
- RS-485 / Modbus RTU
- signal peak value detection
- free configuration software S-Config 2



INDICATOR / CONTROLLER	SWE-N55L	N118 / N1186	457	638	W410
<b>Power supply</b>	from measurement line, min. current 3.5 mA, max. voltage drop 7V	19V ÷ 50V DC; 16V ÷ 35V AC or 85 ÷ 260V AC/DC			
<b>Display</b>	LED, 4 x 13 mm, red	LED, 4 x 20 mm / 6 x 13 mm, red or green	LED, 4 x 57 mm, red, green, blue, multicolor	LED, 6 x 38 mm, red, green, blue	LED, 6 x 100 mm, red
<b>Input</b>	<b>Function</b>				
<b>universal</b>	-	-	controller SUR-457	-	controller SUR-W410
<b>0/4-20 mA</b>	indicator SWE-N55L	controller SRP-N118; controller SRP-N1186; flow counter SPP-N118	-	flow counter SPP-638	-
<b>0/1-5V, 0/2-10V</b>	-	controller SRP-N118	-	-	-
<b>0-60/0-75/0-100/0-150 mV</b>	-	controller SRP-N118	-	-	-
<b>RTD: Pt100, Pt500, Pt1000</b>	-	controller SRT-N118	-	-	-
<b>TC: K, S, J, T, N, R, B, E</b>	-	controller SRT-N118	-	-	-
<b>pulse</b>	-	pulse counter SLIK-N118; flow counter SPI-N118; tachometer STI-N118	timer SLC-457	pulse counter SLIK-638; flow counter SPI-638; tachometer STI-638	-
<b>serial RS-485</b>	-	serial display SWS-N118	serial display SWS-457	serial display SWS-638	-
<b>Binary output</b>	1 x bistable relay 30V/500 mA	0, 2 or 4 REL / OC	0, 2 or 4 REL / OC	0, 2 or 4 REL / OC	2 or 4 REL / OC
<b>Analogue output</b>	none	active current: 0/4-20 mA passive current: isolated, 4-20 mA active voltage: 0/1-5V, 0/2-10V	active current: 0/4-20 mA passive current: isolated, 4-20 mA active voltage: 0/1-5V, 0/2-10V	active current: 0/4-20 mA passive current: isolated, 4-20 mA active voltage: 0/1-5V, 0/2-10V	active current: 0/4-20 mA passive current: isolated, 4-20 mA active voltage: 0/1-5V, 0/2-10V
<b>Power supply output</b>	none	24V DC / max. 100 mA	24V DC / max. 100 mA	24V DC / max. 100 mA	24V DC / max. 100 mA
<b>Communication interface</b>	none	RS-485, Modbus RTU, 1200 ÷ 115200 bit/s			
<b>Protection class</b>	IP 65	IP 67	IP 67	IP 67	IP 30
<b>Operating temperature</b>	0...+50°C (standard), -20...+50°C (option)				
<b>Case dimensions</b>	without gland/connector: 64 x 58 x 36 mm with gland: 64 x 82 x 36 mm with M12 connector: 64 x 73 x 36 mm	without glands: 110 x 80 x 67 mm with glands: 110 x 105 x 67 mm	without glands: 230 x 140 x 96,5 mm with glands: 230 x 168 x 96,5 mm	without glands: 230 x 140 x 96,5 mm with glands: 230 x 168 x 96,5 mm	578 x 208 x 102 mm
<b>Glands</b>	gland M16x1,5 (standard); socket M12, 5-pin + straight cable plug, 5-pin, with PG7 gland (option)	M12, cable diameter 3 ÷ 6,5 mm	M16, cable diameter 5 ÷ 10 mm	M16, cable diameter 5 ÷ 10 mm	-




## SERIAL DISPLAYS / CLOCKS

	W510	W606	W610
<b>Power supply</b>	19V ÷ 50V DC; 16V ÷ 35V AC or 85 ÷ 260V AC/DC	12V ÷ 30V DC	19V ÷ 50V DC; 16V ÷ 35V AC or 85 ÷ 260V AC/DC
<b>Display</b>	LED, 5 x 100 mm, red	LED, 6 x 57 mm, red	LED, 4 x 100 mm + 2 x 57 mm, red
<b>Input:</b>	- serial RS-485 - digital temperature sensor and/or humidity - DCF77 receiver		
<b>Outputs</b>	none	none	none
<b>Power supply output</b>	24V DC / max. 100 mA	24V DC / max. 100 mA	24V DC / max. 100 mA
<b>Communication interface</b>	RS-485, Modbus RTU, 1200 ÷ 115200 bit/s	RS-485, Modbus RTU, 1200 ÷ 115200 bit/s	RS-485, Modbus RTU, 1200 ÷ 115200 bit/s
<b>Protection class</b>	IP 30	IP 30	IP 30
<b>Operating temperature</b>	0°C ÷ +50°C (standard), -20°C ÷ +50°C (option)	0°C ÷ +50°C (standard), -20°C ÷ +50°C (option)	0°C ÷ +50°C
<b>Case dimensions</b>	578 x 208 x 102 mm	364 x 112 x 44 mm	578 x 208 x 102 mm


## Multicolor display versions for 457 and 638 series devices



# Main features

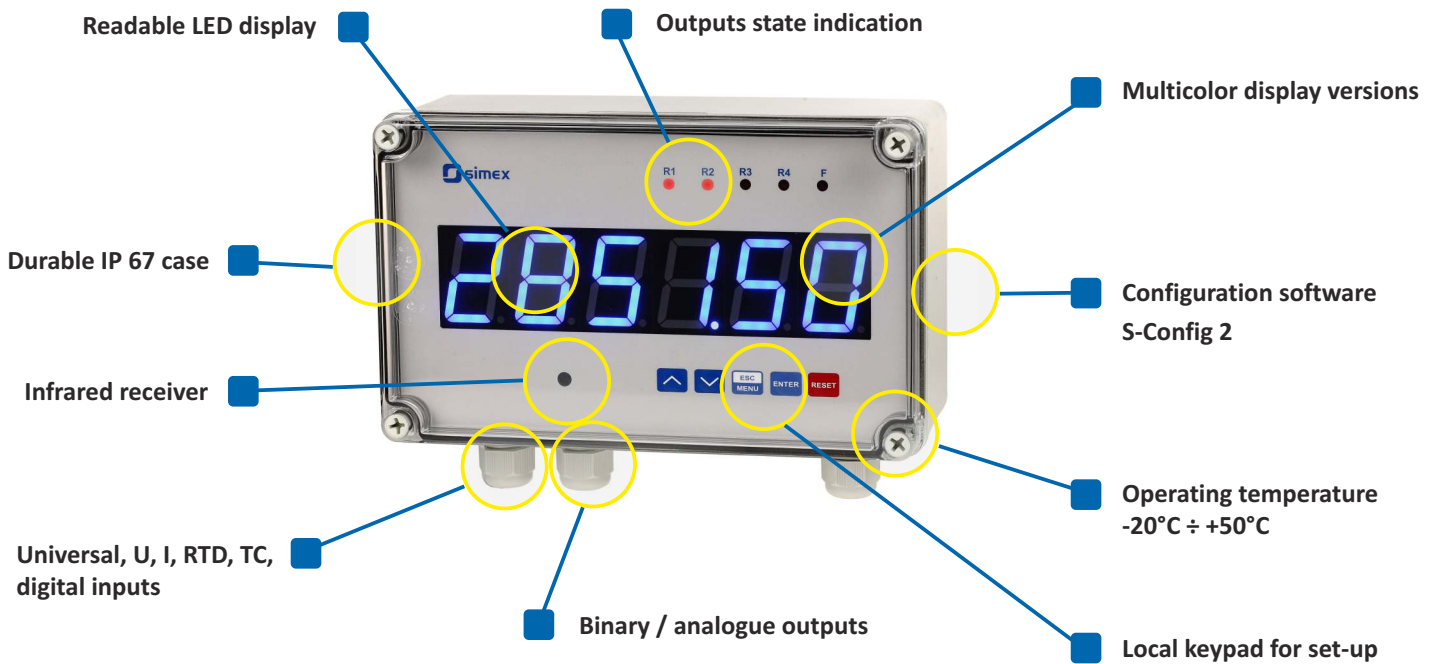


# PC Software

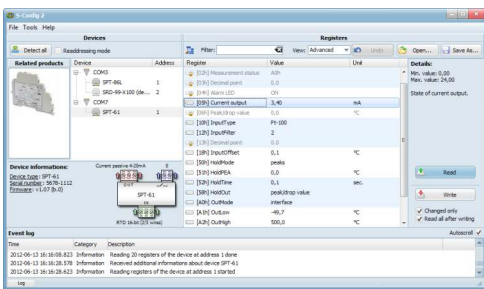

## S-Config 2

The software is used for a simultaneous detection of devices in multiple Modbus RTU networks and provides users with a possibility of changing the configuration of most of the devices. There is a list of registers presented for each detected device. The registers can be modified by users. The lists also include additional information concerning device parameters, such as: type, address, baud rate, etc.

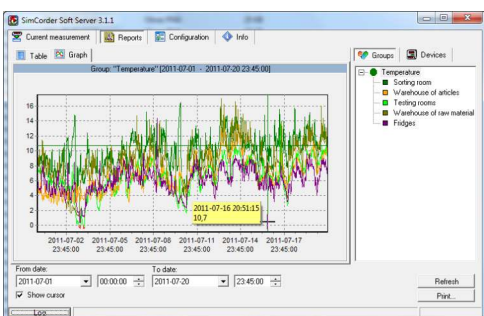

## SimCorder Soft

Visualisation application created to facilitate work with advanced networks of the SIMEX devices, for acquisition, visualisation, reporting, archiving, exporting and printing of measurement data from all network devices. You can download measurements from the devices automatically or on demand. There is a possibility of immediate notification about emergency states via SMS or e-mail, which will often allow to quickly resolve an arising problem while avoiding long and expensive stoppages. You can view the measurement data, emergency states and configuration via the internet at every time.

- DAQ systems data recording
- emails and SMS notifications
- semiSCADA visualization module



SIMEX Ltd.  
Wielopole 11  
80-556 Gdańsk  
Poland  
tel. (+48) 58 762-07-77  
fax (+48) 58 762-07-70  
e-mail: [info@simex.pl](mailto:info@simex.pl)  
[www.simex.pl](http://www.simex.pl)

